


Salesforce Salesforce-MuleSoft-Developer-I

Salesforce Certified MuleSoft Developer 1 Exam (SP24)

**Thank You for Downloading Salesforce-MuleSoft-Developer-I
Updated Exam Questions**

<https://certs4sale.com/salesforce/salesforce-mulesoft-developer-i-pdf-exam-dumps>

Version: 14.0

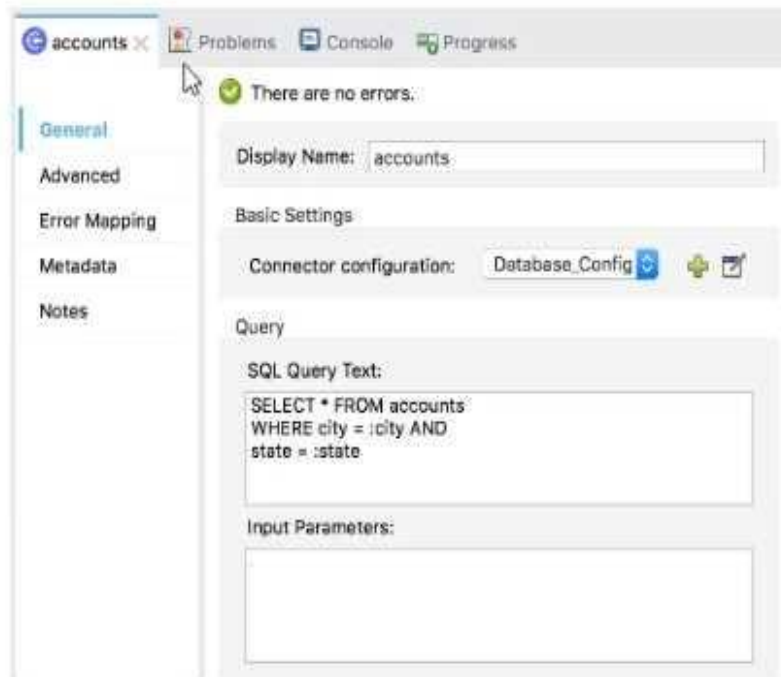


```
#[
  {
    city: "San Francisco",
    state: "CA"
  }
]

#[
  [
    "San Francisco",
    "CA"
  ]
]
```

```
#[
  inputParams: {
    city: "San Francisco",
    state: "CA"
  }
]
```

```
#[
  inputParams: [
    "San Francisco",
    "CA"
  ]
]
```

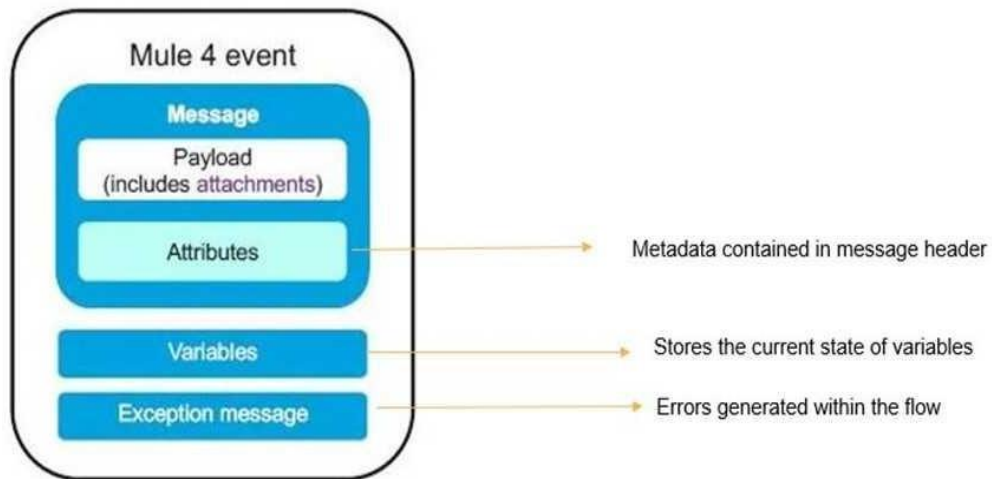



```

<flow name="validatePayload" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <set-payload value="Before" doc:name="Before" />
  <validation:is-null doc:name="payload" value="#[payload]" message="Validation Error"/>
  <set-payload value="After" doc:name="After" />
</flow>

```

question12Flow

```

graph LR
    Listener[Listener HTTP GET] --> SetBefore[Set Payload "Before"]
    SetBefore --> IsNull[Is null payload]
    IsNull --> SetAfter[Set Payload "After"]
    SetAfter --> Listener
    IsNull --> ErrorHandler[Error handling]
    ErrorHandler --> Listener
  
```

Message Flow: Global Events - Configuration XML

```

<?xml version="1.0" encoding="UTF-8" standalone="yes">
<message>
  <validation:is-null doc:name="payload" doc:id="3d0272d6-0a27-46ea-bf46-bcc26b1e660b" value="#[payload]" message="Validation Error"/>
</message>

```

Advanced REST client




Method: GET
Request URL: http://localhost:8086/q12

Request parameters

500 Server Error 3941.33 ms

COPY SAVE SOURCE VIEW

Validation Error

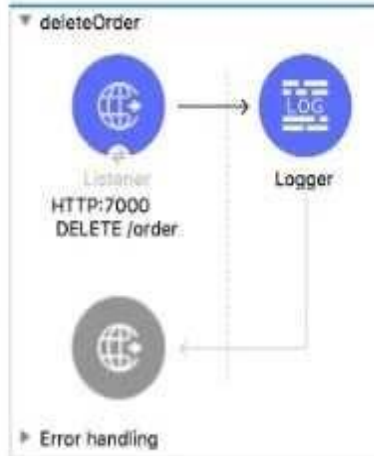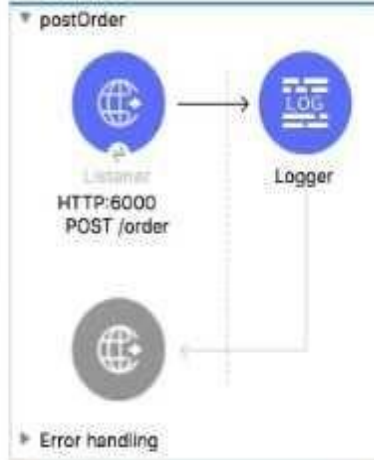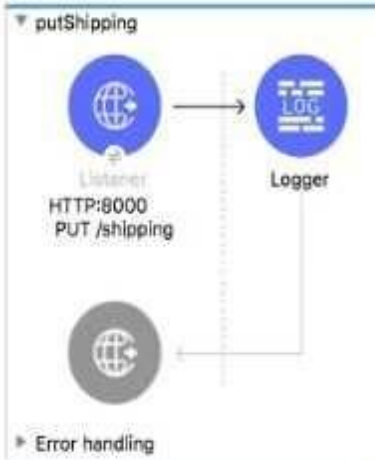

Global Element Properties

×

HTTP Listener config
Configuration element for a HttpListener.

GeneralNotesHelp

Name: HTTP_Listener_config

Connection

GeneralTLSTLSAdvanced

Connection

Protocol: HTTP (Default) ▾

Host: All Interfaces [0.0.0.0] (default) ▾


Port: 6000

?

Test Connection...

OK


Cancel

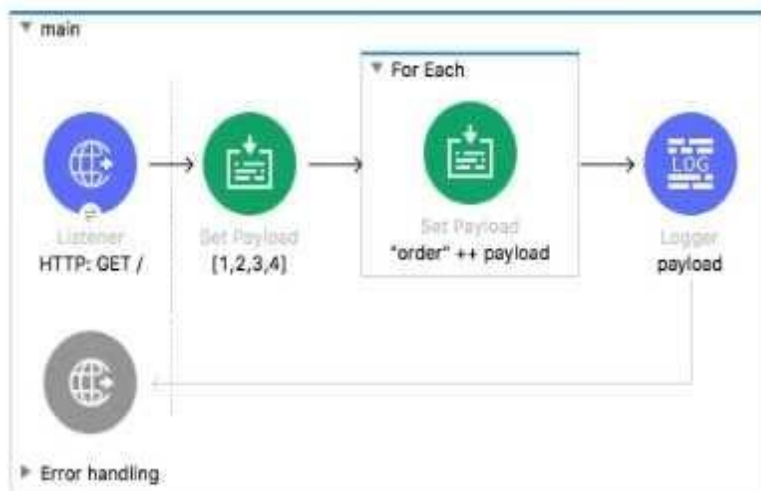

```

<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <set-payload value="#[[1,2,3,4]]" doc:name="[1,2,3,4]" />
  <foreach doc:name="For Each" >
    <set-payload value="#["order" ++ payload]" doc:name="order" ++ payload" />
  </foreach>
  <logger level="INFO" doc:name="payload" message="#[payload]" />
</flow>


```

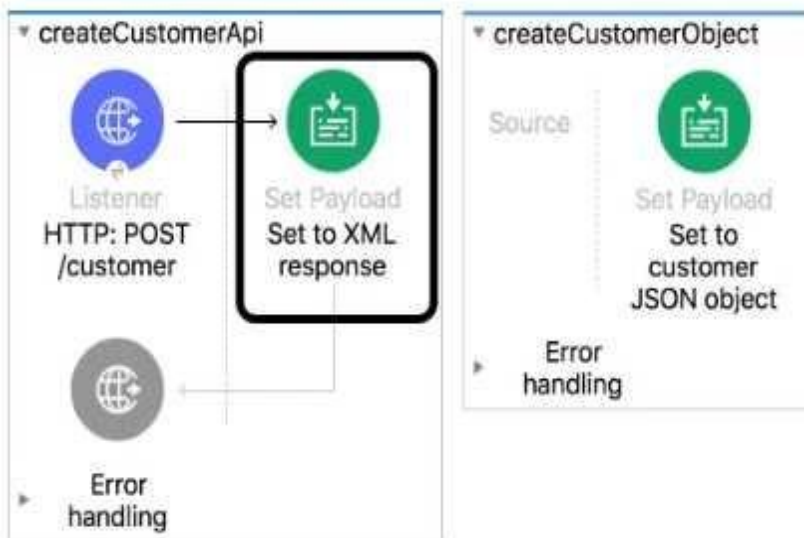

execute another flow within your app and to retrieve the resulting payload. It takes the flow's name

Payload

```
{
  "transaction_id": "SS-4848-44KK-4SYQ",
  "account_id": "KA-382-SKD44",
  "name": "Max Mule",
  "position": "sell"
}
```

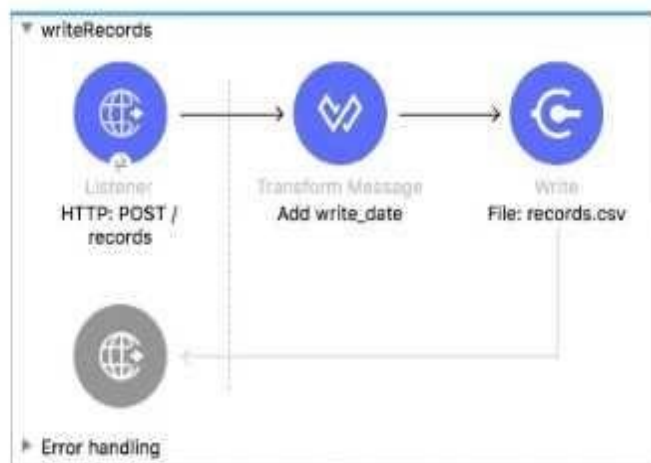


```
<flow name="writeRecords" >
  <http:listener doc:name="HTTP: POST /records" config-ref="HTTP_Listener_config"
    path="/records" allowedMethods="POST"/>
  <ee:transform doc:name="Add write_date">
    <ee:message >
      <ee:set-payload ><![CDATA[%dw 2.0
        output application/json
        ---
        payload ++ {"write_date": now()}]]>
      </ee:set-payload>
    </ee:message>
  </ee:transform>
  <file:write doc:name="File: records.csv" path="file-store/records.csv">
    <file:content ><![CDATA[#payload]]></file:content>
  </file:write>
</flow>
```

```
#%RAML 1.0
title: ACME Airlines
version: 1.0
```

```
/flights:
  get:
    responses:
      200:
      404:
  /airline:
    get:
      queryParameters:
        code: string
      responses:
        200:
        404:
```

```
/accounts:
  get:
    responses:
      200:
      404:
  post:
    responses:
      201:
```

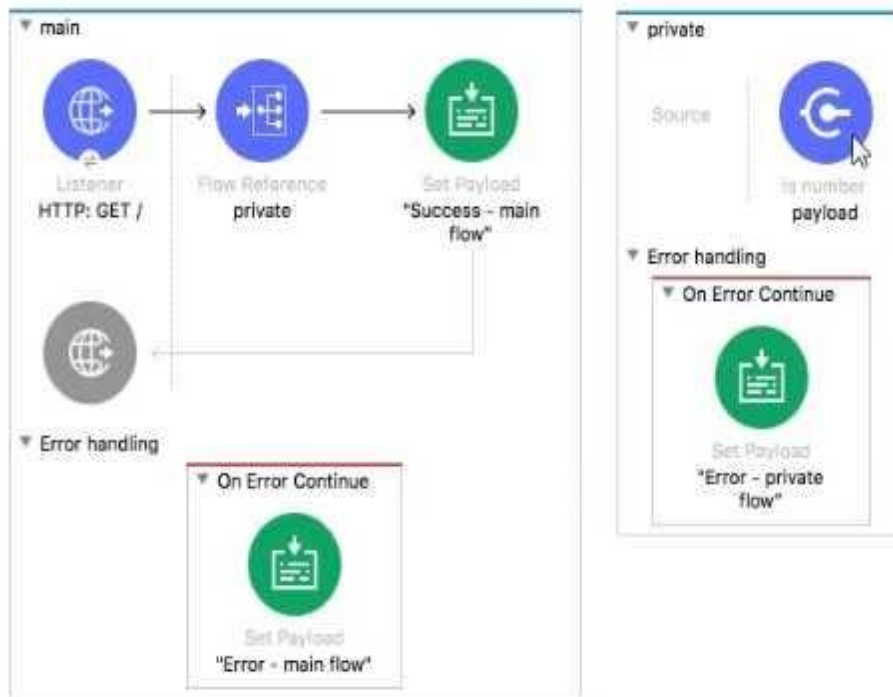

```


<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" />
  <flow-ref doc:name="private" name="private"/>
  <set-payload value="Success - main flow" doc:name="Success - main flow" />
  <error-handler>
    <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue" >
      <set-payload value="Error - main flow" doc:name="Error - main flow" />
    </on-error-continue>
  </error-handler>
</flow>

<flow name="private" >
  <validation:is-number numberType="INTEGER" doc:name="payload" value="#[payload]"
  message="Validation Error" />
  <error-handler >
    <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue" >
      <set-payload value="Error - private flow" doc:name="Error - private flow" />
    </on-error-continue>
  </error-handler>
</flow>
  
```

“Error – scope”

“Error – Try scope” is returned to the 'On Error Continue' block. Main flow execution stops.

“Error – main flow” is returned to the requestor in the body of the HTTP request. HTTP Status

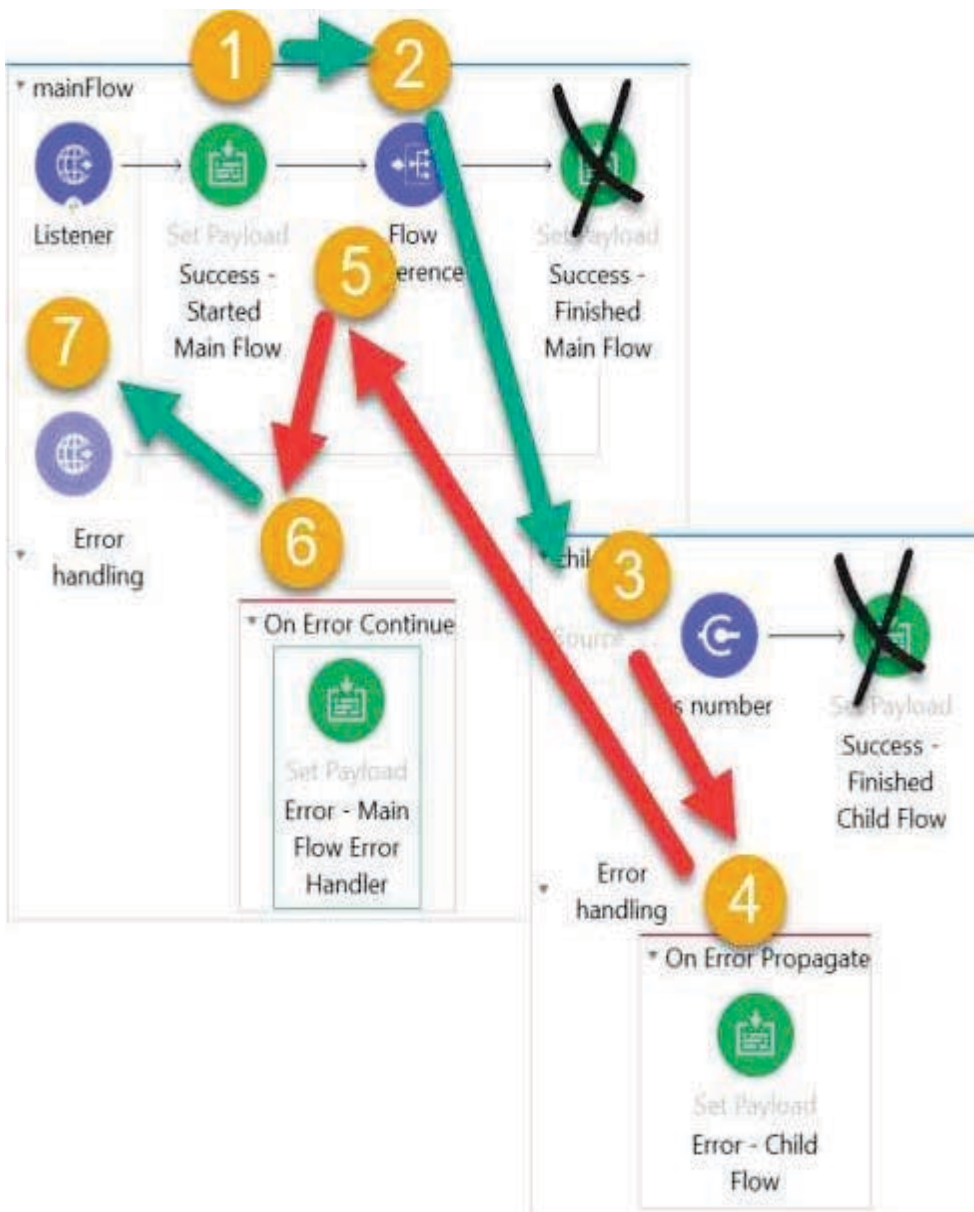

```
#%RAML 1.0
title: ACME Telecom API
version: 1.0
```

```
/accounts:
  post:
    body:
      application/json:
        example: |
          {
            "account_id": "562-123-3456",
            "plan": "all-inclusive"
          }
```

Parameters ^

Headers

Authorization



<> Toggle source mode



Insert headers set

Header name

Header value

Content-Type

text/plain

ADD HEADER



Headers are valid

415 Unsupported Media Type

1058.44 ms



```
{
  "message": "Unsupported media type"
}
```

Headers Post Response HTML Cookies

HTTP Status 415 - Unsupported Media Type


type Status report

message Unsupported Media Type

description The server refused this request because the request entity is in a format not supported by the requested resource for the requested method.

Apache Tomcat/7.0.59



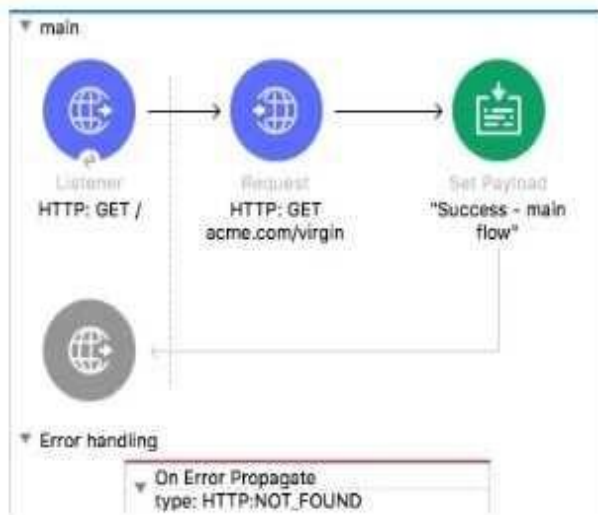

```


<http:listener-config name="HTTP_Listener_config" doc:name="HTTP Listener config">
  <http:listener-connection host="0.0.0.0" port="8081" />
</http:listener-config>

<flow name="main">
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <http:request method="GET" doc:name="HTTP: GET acme.com/virgin" url="http://acme.com/virgin" >
    <error-mapping sourceType="HTTP:NOT_FOUND" targetType="APP:API_RESOURCE_NOT_FOUND" />
  </http:request>
</flow>

```

What response message is returned?"

“APP:API_RESOURCE_NOT_FOUND.” is the error message returned to the requestor in the body

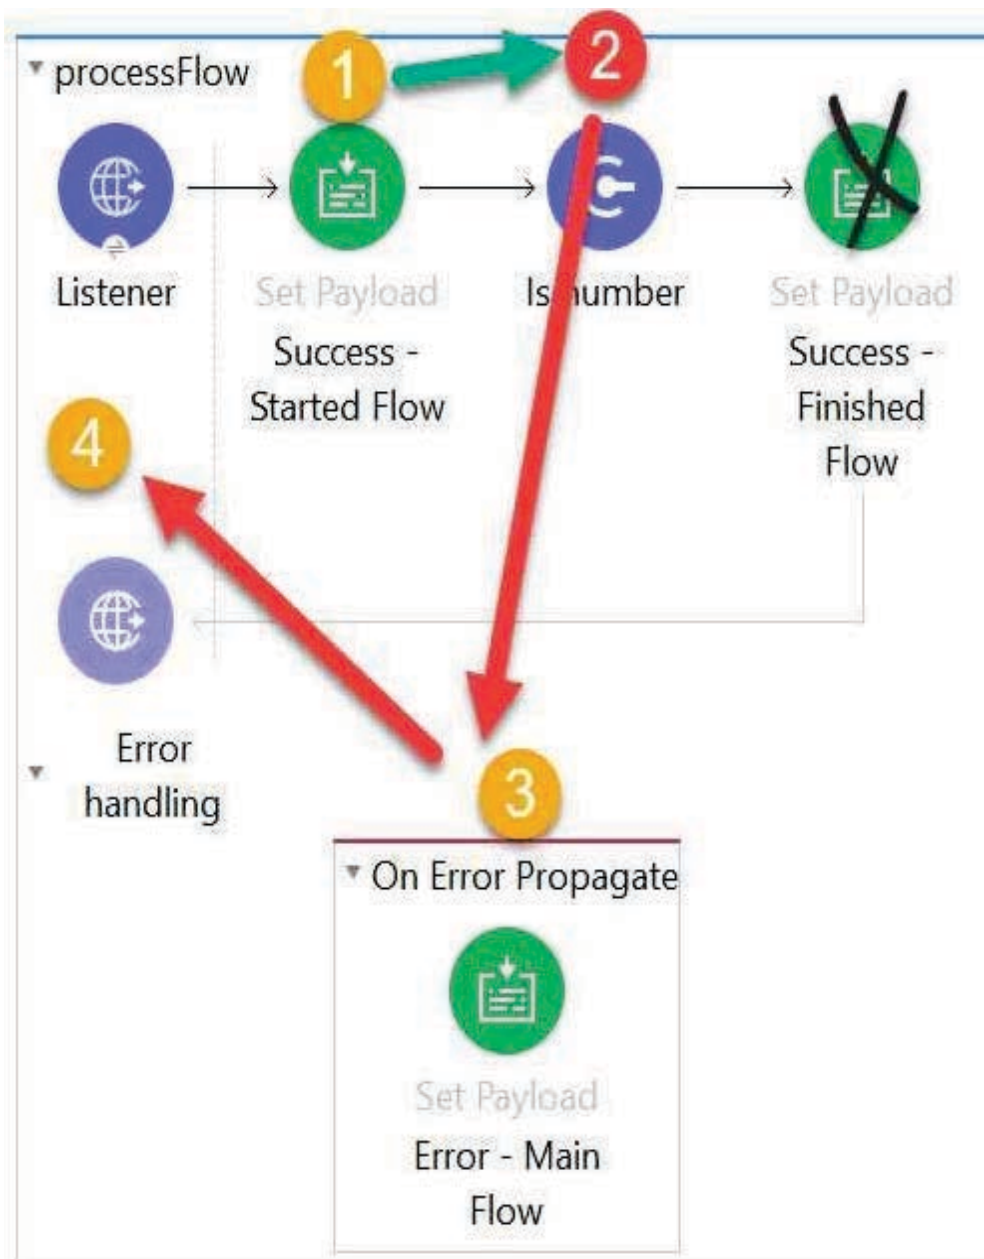

```
#%RAML 1.0
title: Accounts API
version: 1.0

/accounts:
  get:
    description: Get all accounts
    responses:
      200:
        body:
          application/json:
            example:
              id: "48292"
              name: Geordi La Forge
              address: 1 Forge Way, Midgard, CA 95928
              customer_since: "2014-01-04"
              balance: 4829.29
  post:
    description: Create an account
    body:
      application/json:
        example:
          name: Geordi La Forge
          address: 1 Forge Way, Midgard, CA 95928
          customer_since: "2014-01-04"
```

```
{
  "id": "48292",
  "name": "Geordi La Forge",
  "address": "1 Forge Way, Midgard, CA 95928",
  "customer_since": "2014-01-04",
  "balance": 4829.29
}
```

```
<item>
  <id>48292</id>
  <name>Geordi La Forge</name>
  <address>1 Forge Way, Midgard, CA 95928</address>
  <customer_since>2014-01-04</customer_since>
  <balance>4829.29</balance>
</item>
```

```
<item>
  <name>Geordi La Forge</name>
  <address>1 Forge Way, Midgard, CA 95928</address>
  <customer_since>2014-01-04</customer_since>
  <balance>4829.29</balance>
  <bank_agent_id>48-SJT-282924-KL</bank_agent_id>
</item>
```

```
{
  "name": "Geordi La Forge",
  "address": "1 Forge Way, Midgard, CA 95928",
  "customer_since": "2014-01-04",
  "balance": 4829.29
  "bank_agent_id": "48-SJT-282924-KL"
}
```

```
#%RAML 1.0
title: ACME Telecom API
version: 1.0

/plans:
  get:
    responses:
      200:
        body:
          application/json:
            example: |
              [
                {
                  "plan_type": "Super Saver 500",
                  "plan_details": "all-inclusive",
                  "monthly_discount": 0.10
                },
                {
                  "plan_type": "Business Plus 1000",
                  "plan_details": "business package",
                  "monthly_discount": 0.20
                }
              ]
```

```

#%RAML 1.0
title: ACME Telecom API
version: 1.0

dataTypes:
  Plan: !include ACME/DataTypes/PlanDataType.raml

/plans:
  get:
    responses:
      200:
        body:
          application/json:
            type: Plan[]
            example: !include ACME/Examples/PlanExamples.raml

```

```

#%RAML 1.0
title: ACME Telecom API
version: 1.0

types:
  Plan: !reference ACME/DataTypes/PlanDataType.raml

/plans:
  get:
    responses:
      200:
        body:
          application/json:
            type: Plan[]
            example: !reference ACME/Examples/PlanExamples.raml

```

```

#%RAML 1.0
title: ACME Telecom API
version: 1.0

dataTypes:
  Plan: !reference ACME/DataTypes/PlanDataType.raml

/plans:
  get:
    responses:
      200:
        body:
          application/json:
            type: Plan[]
            example: !reference ACME/Examples/PlanExamples.raml

```

```
##RAML 1.0
title: ACME Telecom API
version: 1.0

types:
  Plan: !include ACME/DataTypes/PlanDataType.raml

/plans:
  get:
    responses:
      200:
        body:
          application/json:
            type: Plan[]
            example: !include ACME/Examples/PlanExamples.raml
```



Main Flow



Referenced Flow



THANK YOU FOR DOWNLOADING SALESFORCE-MULESOFT-DEVELOPER-I UPDATED EXAM QUESTIONS

Note: Thanks For Trying The Demo Of Our Salesforce-MuleSoft-Developer-I Exam Product

Visit Our Site to Purchase the Full Set of Actual Salesforce-MuleSoft-Developer-I Exam Questions With Answers.

Money Back Guarantee



Click The Link Below

<https://certs4sale.com/salesforce/salesforce-mulesoft-developer-i-pdf-exam-dumps>